



1/18/2019 11:11:11am By: wechamps
Plotted On: Jan 18, 2019 11:11am
Tighe & Bond: S2087 Stamford 1031 Mold Remediation.dwg

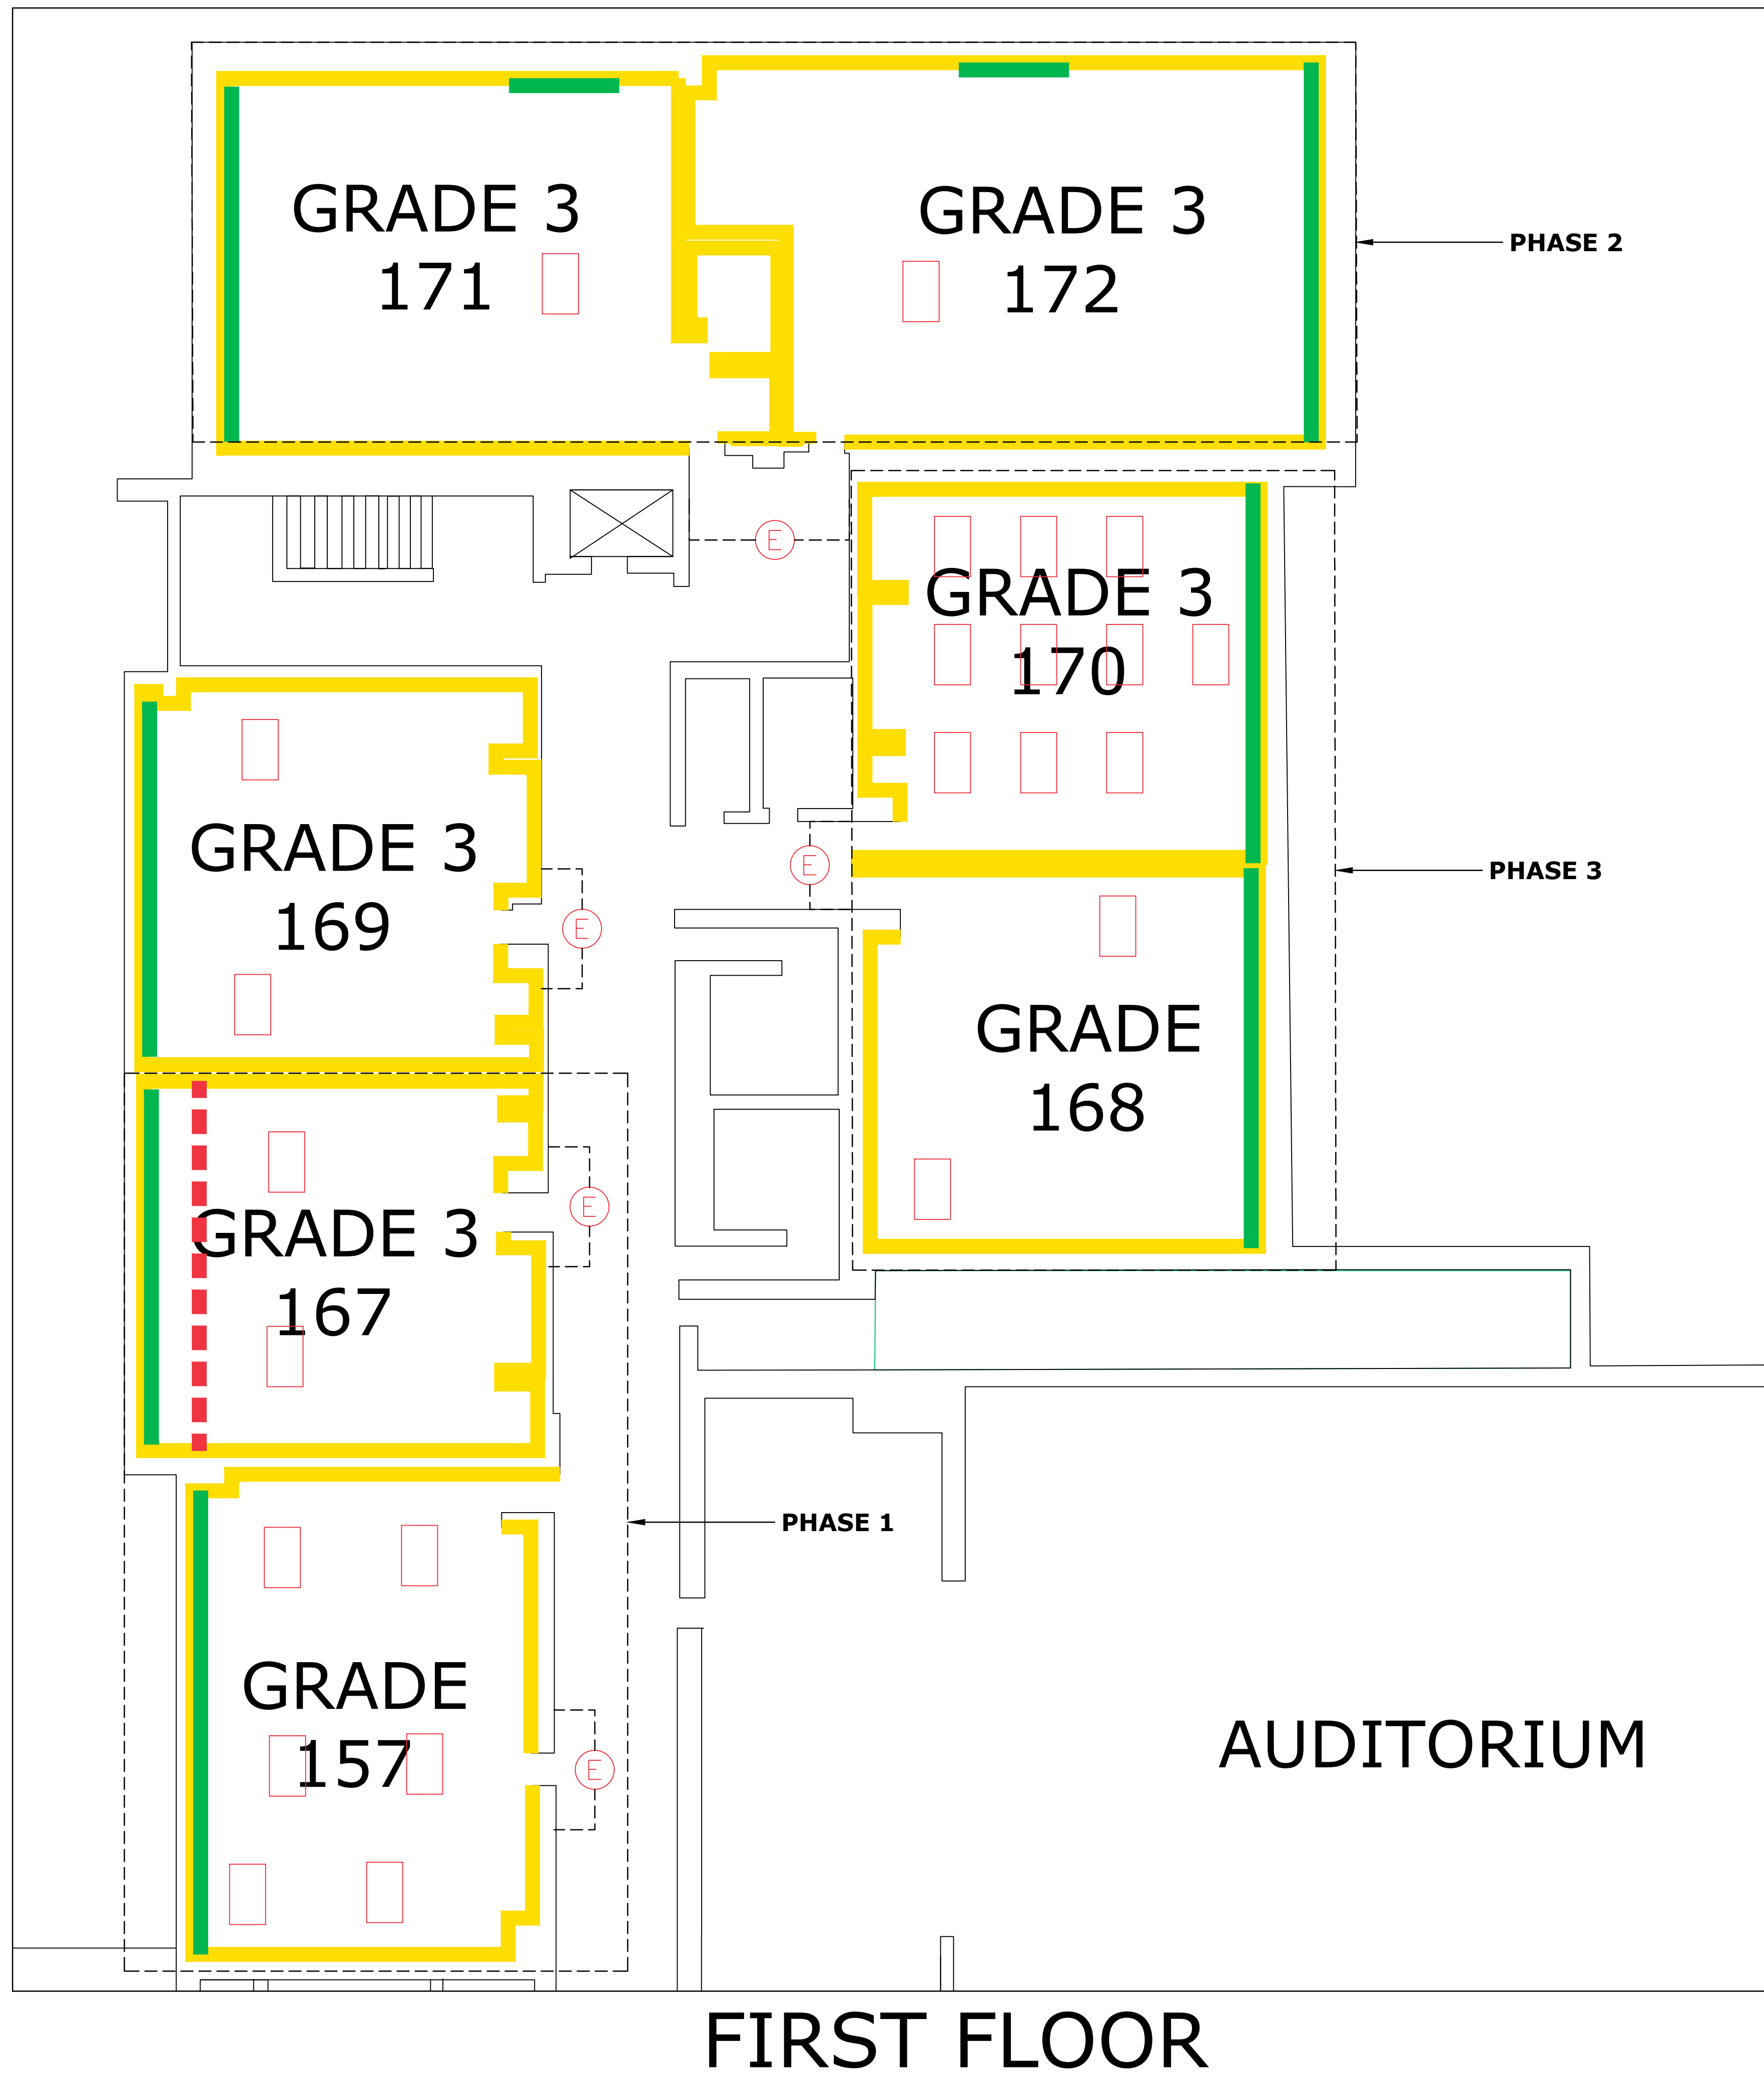

- ROOM 157 SCOPE OF WORK NOTES PHASE 1**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 800 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 60 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 2 RETURNS AND ONE HEAT VENT
 - REMOVE 6 ACT
 - INSPECT PIPING ABOVE ACT POSSIBLE DRIPPAGE FROM PIPING AS CORROSION WAS OBSERVED
- ROOM 167 SCOPE OF WORK NOTES PHASE 1 AND PHASE 5 (FEBRUARY BREAK)**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 875 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 60 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 2 RETURNS AND ONE HEAT VENT
 - PHASE 5 - ABATE 25 MUDDLED ELBOWS AND FITTINGS AND 175 FEET OF YELLOW FIBERGLASS INSULATION (ALL COVERED IN MOLD)
 - REMOVE 2 ACT
- ROOM 168 SCOPE OF WORK NOTES PHASE 3**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 860 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 60 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 2 RETURNS AND ONE HEAT VENT
 - REMOVE 1 ACT
- ROOM 169 SCOPE OF WORK NOTES (DIMENSIONS SAME AS 167) PHASE 4**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 875 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 60 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 2 RETURNS AND ONE HEAT VENT
 - REMOVE 2 ACT
- ROOM 170 SCOPE OF WORK NOTES PHASE 3**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 800 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 60 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 2 RETURNS AND ONE HEAT VENT
 - REMOVE 13 ACT
- ROOM 171 SCOPE OF WORK NOTES PHASE 2**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 825 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 70 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 2 RETURNS AND ONE HEAT VENT
 - REMOVE 1 ACT
- ROOM 172 SCOPE OF WORK NOTES PHASE 2**
- SET UP EDGE GUARD AT ROOM ENTRANCE
 - REMOVE APPROXIMATELY 850 SF OF VINYL WALL PAPER
 - REMOVE APPROXIMATELY 60 SF OF SHEETROCK AROUND WINDOW UNIT
 - CLEAN EXPOSED FIN TUBE RADIANT PIPING AFTER MILLWORK IS REMOVED
 - CLEAN 3 RETURNS AND ONE HEAT VENT
 - REMOVE 1 ACT

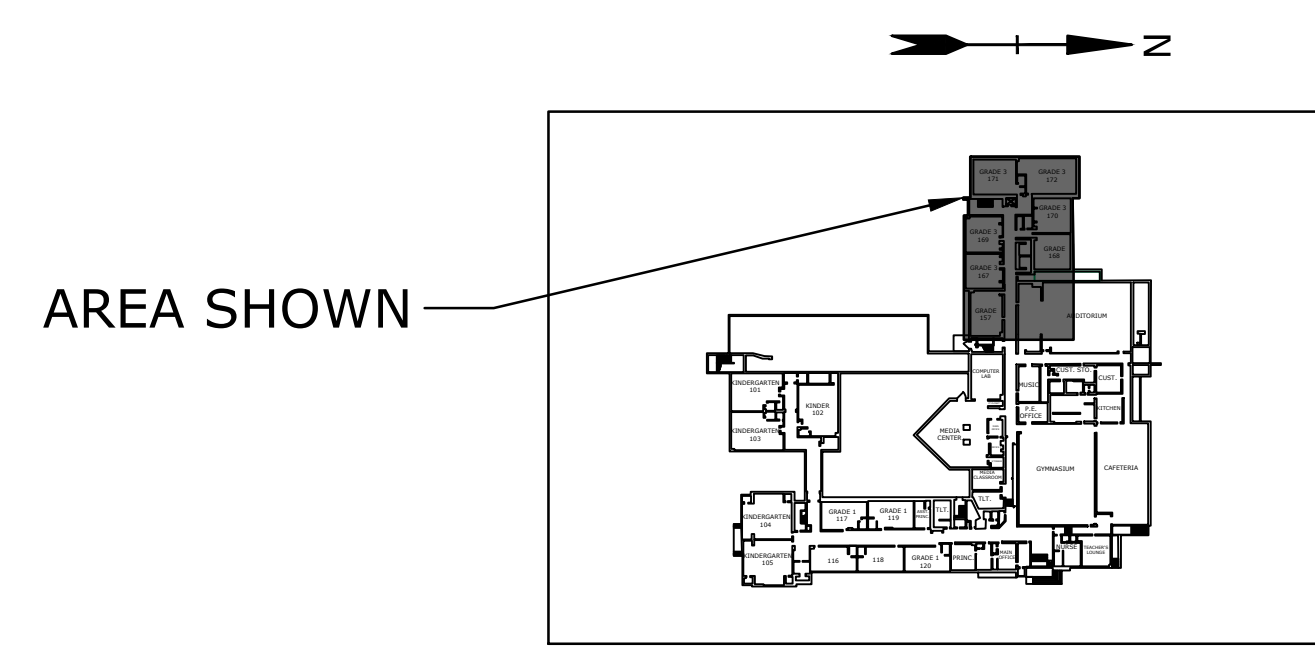

MARK	DATE	DESCRIPTION
PROJECT NO: S2087		
DATE: 1/18/2019		
FILE: Stark Mold Remediation.dwg		
DRAWN BY: WAC		
CHECKED: XX		
APPROVED: XX		